




The complex consists of seven vertical columns of different height, Swedish wall section and three crossbars with the length of 1200 mm. Swedish wall consist of crossbars, with the distance between the bars – 407 mm. Height of the Swedish wall – 2073 mm, width – 1200 mm. Parallel bars consist of 2 horizontal crossbars, length of the bars is 1758 mm. Distance between the columns for the parallel bars, is 600 mm. Optionally, two crossbars can be re-designed to be 1758 mm in length. The complex is secured together with aluminium clamps.

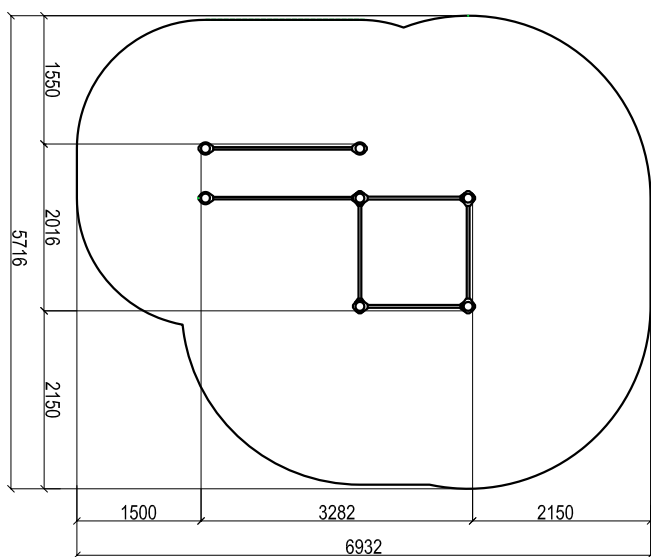

TECHNICAL DESCRIPTION

LENGTH:	3282 MM	
WIDTH:	2016 MM	
HEIGHT:	2650 MM	
LONGEST PART WHEN TRANSPORTING:	3350 MM	
WEIGHT:	250 KG	
REQUIRED GROUND AREA:	6932 X 5716 MM	
PIPE MEASUREMENTS:	DIAMETER:	WALL THICKNESS:
	108 MM 34 MM	3,2 MM 3,2 MM
METAL PARTS:	POWDER COATED STEEL RAL 7016	
CLAMPS:	POWDER COATED SILUMIN ALLOY RAL 3020	
BOLTS:	HOT GALVANIZED BOLTS M10	
MAX. CROSSBAR HEIGHT:	2450 MM	
USER AGE:	CHILDREN UNDER 14 YEARS ONLY UNDER SURVEILLANCE OF PARENTS	
MAX. USER WEIGHT:	130 KG	
CERTIFICATES:	TÜV RHEINLAND INTERCERT KFT	

CERTIFIED:



Precisely Right.

RECOMMENDED:



WSWCF
WORLD FEDERATION
STREET WORKOUT & CALISTHENICS