


# STANDARD PARALLEL BARS

## K-010



The construction consists of four vertical columns and two horizontal crossbars. Crossbar length is 1758 mm. The distance between the parallel bars is 600 mm. Crossbars are secured to the columns with aluminium clamps at the height of 1300 mm from the foundation.

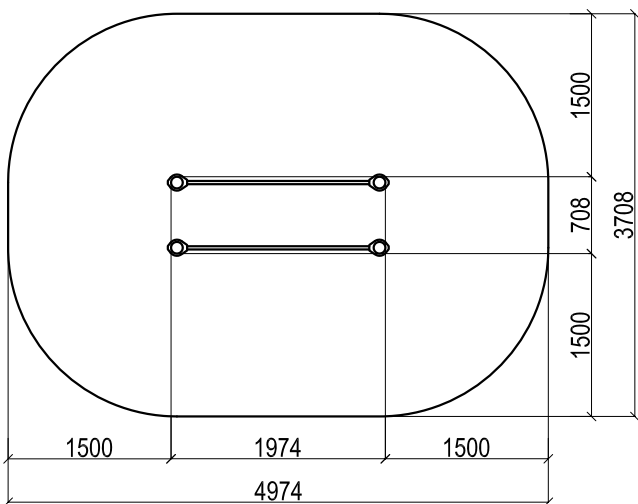

### TECHNICAL DESCRIPTION

LENGTH:	1974 MM	
WIDTH:	708 MM	
HEIGHT:	1550 MM	
LONGEST PART WHEN TRANSPORTING:	2150 MM	
WEIGHT:	100 KG	
REQUIRED GROUND AREA:	4974 X 370 8 MM	
PIPE MEASUREMENTS:	DIAMETER:	WALL THICKNESS:
	108 MM	3,2 MM
	34 MM	3,2 MM
METAL PARTS:	POWDER COATED STEEL RAL 7016	
CLAMPS:	POWDER COATED SILUMIN ALLOY RAL 3020	
BOLTS:	HOT GALVANIZED BOLTS M10	
MAX. CROSSBAR HEIGHT:	1300 MM	
USER AGE:	CHILDREN UNDER 14 YEARS ONLY UNDER SURVEILLANCE OF PARENTS	
MAX. USER WEIGHT:	130 KG	
CERTIFICATES:	TÜV RHEINLAND INTERCERT KFT	

CERTIFIED:   
**TÜVRheinland**<sup>®</sup>  
 Precisely Right.

RECOMMENDED:   
**WSWCF**<sup>®</sup>  
 WORLD FEDERATION  
 STREET WORKOUT & CALISTHENICS